
OSHFA01 NFC Module

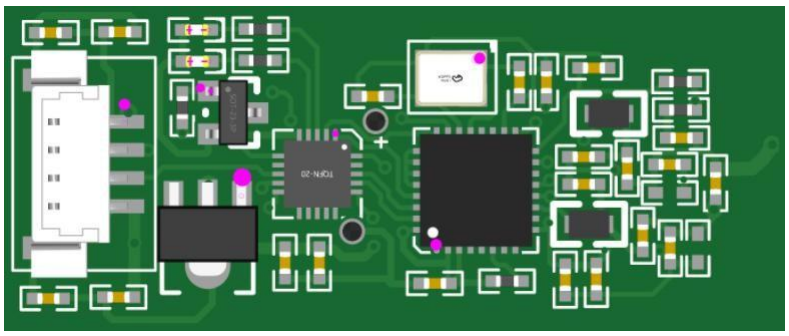

Communication Interface	UART TTL232 (9600-115200bps) 5V
Power Supply	5V max 100mA（related requirements for reading distance）
Supported Protocols	ISO/IEC 14443A （MF1 S50、MF1 S70、Ntag21x)
Read/Write Speed	106kbit/s 212kbit/s 424kbit/s
Reading Distance	Up 0 to 50 mm
Built-in (Optional Accessory)	
Buzzer	Active
LED Indicator	2 LED (Red, Green)
Housing	None
Dimensions	35mm (L) x15mm (W) x 8mm (H)
Weight	3g
Water Resistance	Optional Waterproof, Moisture-proof and Dust-proof Design (except 4-pin connector)
Operating Temperature	-20°C – 85°C